



QUICK SET-UP GUIDE

PLUMBED READY • T714C

A. SET-UP




NOTE:
Please consult a professional
plumber if necessary.




1 Remove adhesive tapes.
Unwrap the Power Cord.



2 View the rear of the product
for connecting water supply line.

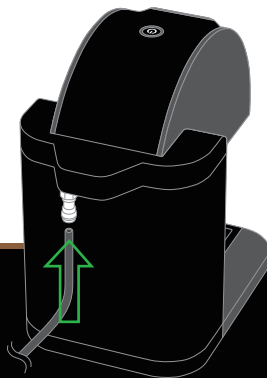

3 Insert a 1/4" diameter water
supply line into the adapter on
the rear of the Water Tank.

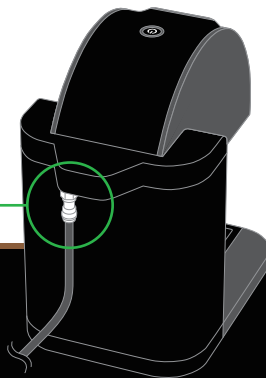

4 If the water supply line is
not 1/4" diameter, an adapter
may be needed.




WARNING:
DO NOT pull the Latch
while brewing.



NOTE:
The first brewing cycle may take
up to 30 seconds to start.




5 Plug the Power Cord into
an electrical outlet.
Press the Power Button.

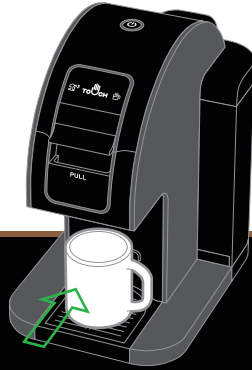

6 Place a large mug or cup
on the Drip Tray. (min. 12oz)




7 Press on the 10 oz Cup Size
Button to start brewing.

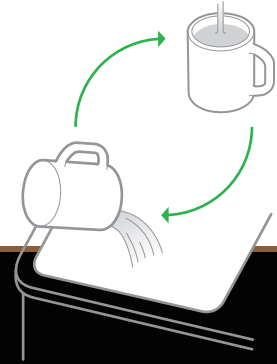


8 Discard the hot water and
repeat steps 6 and 7 at least
two (2) more times.


B. BREW




⚠ WARNING:
Sharp Needles on the Top Cover
and in the Red Cup Holder.




⚠ WARNING:
Coffee Pod may be HOT.

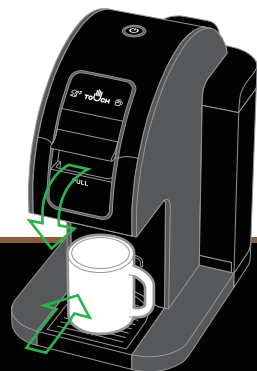

9 Place a mug on the Drip Tray and lift the Cover by pulling on the Latch.

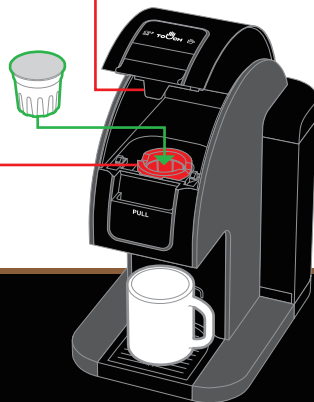

10 Insert a coffee pod into the Red Cup Holder. Close the Cover.

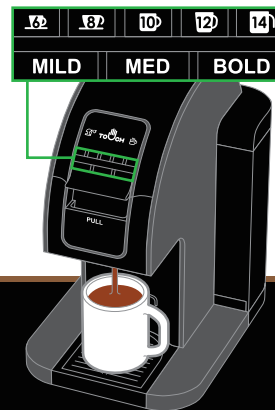

11 Press the desired Cup Size Button to start brewing. Enjoy your beverage!

The default taste setting is BOLD, but this can be changed by pressing either MILD or MED.